


Packing list

Please carefully check whether the items in the package are complete and intact. If there are any problems such as missing or damages, you can contact the after-sales service.




The picture is for reference only, so the actual appearance is based on the real object.

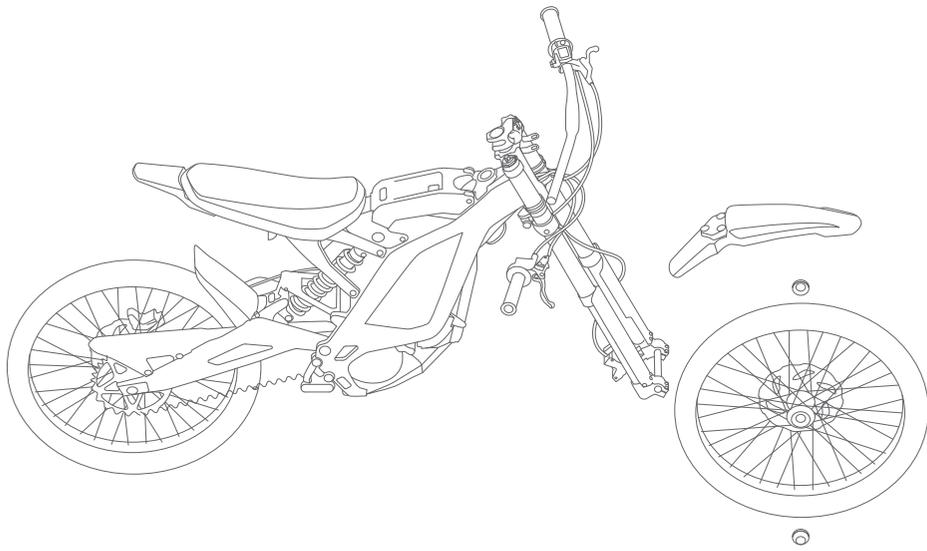

Light Bee S Packing list & Quick Assembly Guide www.sur-ron.com

The practical appearance and function of the product will not be completely consistent with the description of this manual because of technology upgrade and firmware update, So the actual appearance is based on real object. Please download the update manual for the latest performance instruction and security guide by visiting our official website or communicate with other users on our official website BBS.




User Manual & After-Sales Manual




Packing list & Quick Assembly Guide




Foot Peg X1




Key X2



Battery
+
Battery Bottom Buffer Foam



Toolkit




Charger

Quick Assembling Guide

Handlebar Assembly


1.Loosing the 4 locking screws with 4# internal hexagonal wrench and taking the fixing cover down.

* Please do not lose the screw gasket.

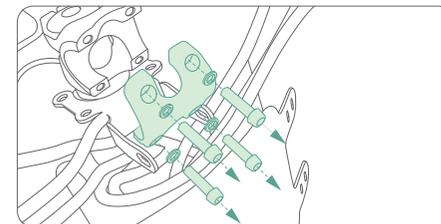


2.Fix the front brake lever and throttle on the handlebar in turn


* Do not tighten them

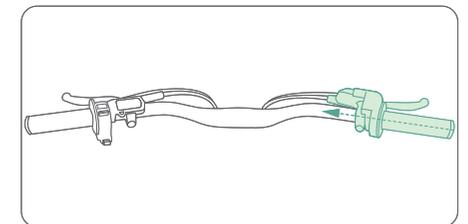

3.Put the handlebar on the handlebar stem, then fixing the handlebar cover and aligning the handlebars to the handlebar stem according to the scale mark.

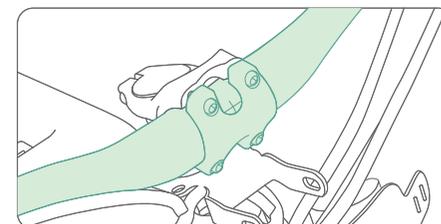

4.Tightening the 4 locking screws with 4# internal hexagonal wrench.

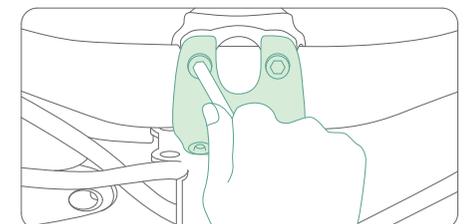

The picture is for reference only,The actual appearance is based on the real object.

Front brake lever




& throttle assembly

1.As shown in the illustration, please adjust the front brake lever and throttle to right angle.

2.Please separately tighten the front brake lever and throttle with 4# internal hexagonal wrench and 5# internal hexagonal wrench.



3Please rotate the throttle and check whether the throttle can smoothly return.

* you can check the mount position of the throttle and the direction of the throttle cable ,if it is jammed.



4.Please remove the brake clipper clamping block, and place the front wheel on the wheel mounting position of front shock absorber.

*Please pay attention to the brake clipper as you mount the front wheel.

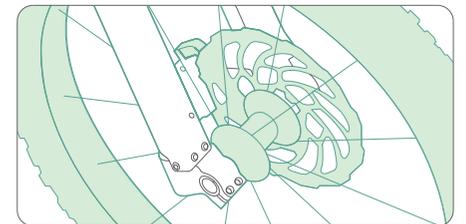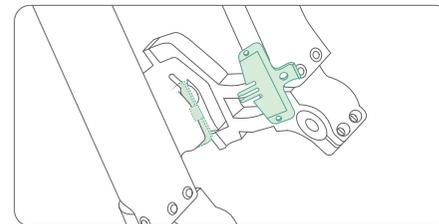




Front Wheel

Assembly

1.Loosing the 4 screws below front shock absorber with 4# internal hexagonal wrench.

2.Loosing the locking screw located on either side of the front wheel axle with 8# internal hexagonal wrench. Please lightly knock the axle to take it out.




3.Please separately mount the front wheel bushing on either side of the front wheel axle.
* Don't crush the seal ring.



5.Mounting the axle, and making it through the front wheel axle and the front shock absorber in turn.

6.Tightening the nuts on either side of the front wheel axle with 8# internal hexagonal wrench, and checking whether they are well fixed.

7. Tightening the 4 screws below front shock absorber with 4# internal hexagonal wrench.




The picture is for reference only,The actual appearance is based on the real object.

Front Fender Assembly

Removing the 3 bolts located on the position of below illustration shows.

Mounting front fender, and then tightening the bolts with 4# internal hexagonal, finally check whether the front fender is tightly fixed.



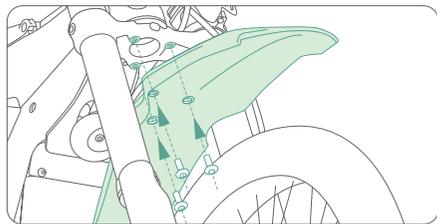


2. Putting the battery into the bike.

* * Direction of battery: Charging interface towards the left side of this bike

3.Connecting discharge plug and communication plug.

4.Turning on the circuit breaker towards the right, locking the battery compartment cover, and safely keeping your key.



The picture is for reference only,The actual appearance is based on the real object.

Battery Assembly

* Precondition: the bike is turned off.

1. Opening the battery box and take out the battery. Please anticlockwise rotate the key to open the battery compartment cover. Ensuring to turn off the left side of circuit breaker.

